




Modular linear axis system **SYZAX COMPACT**



Online
configurator
syzax.com

SYZAX COMPACT linear modules form the middle of the **SYZAX** range.

SYZAX COMPACT modules offer the same forces as the **SYZAX HEAVY** and are available in 6 versions of carriages and performances.

DYNAMIC

Ideal for «Pick & Place» cycles below the second.

RIGID

High tolerance to off-center loads.

COMPACT

The best in its class for a given range of performances.

MODULAR

Easy mechanical and electrical integration, compatible with a wide range of market drives.

ARCOZ, official distributor for: North Italy • Southern Germany • Western Austria • Switzerland

SYZAX is a registered trademark of Optique et Microsystèmes SAS : OPµS SAS 7, rue du commerce 01460 PORT (France). ©2023 SYZAX. All rights reserved.

Electromechanical Data


Carriage type	Unit	C1	C2	C3	C4	C5	C6
Peak force	N	450	675	900	1125	1350	1800
Continuous force	N	210	315	420	525	630	840
Peak current	A	6.5	6.5	13.1	13.5	19.6	26.2
Continuous current	A	2.3	2.3	4.5	4.7	6.8	9
Maximum speed	m/s	3.5	2.5	3.5	3.5	3.5	3.5

Guidance Features

Carriage type	Unit	C1	C2	C3	C4	C5	C6
Load rating Fy	N	7350	7350	7350	7350	7350	7350
Load rating Fz	N	24500	24500	24500	24500	24500	24500
Moment rating Mx	Nm	1040	1040	1040	1040	1040	1040
Moment rating My	Nm	1270	1270	1690	1950	2340	3460
Moment rating Mz	Nm	710	710	860	960	1110	1570



Syzax Compact is available with 3 different types of encoders:

Encoders	Standard	High	Ultra high performance
Resolution	1 µm	0.25 µm	0.1 µm
Short range accuracy	±10 µm/10 mm	± 2 µm/mm	± 0.5 µm/mm
Accuracy before compensation	± 40 µm/m	± 50 µm/m	± 20 µm/m
Accuracy after compensation	± 20 µm/m	± 10 µm/m	± 3 µm/m

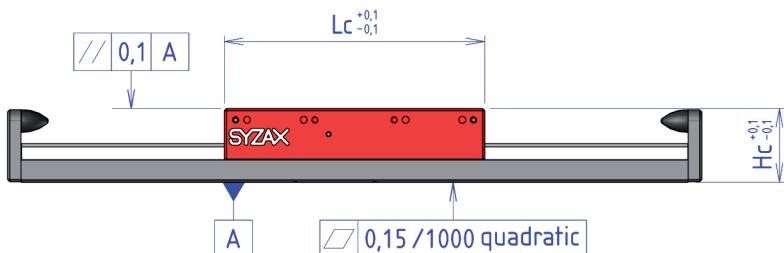

The maximum length of the module is 3 meters. The stroke selection is free, modulo 1 mm.

The effective stroke corresponds to the track length minus the carriage length and the thickness of the 2nd stops (standard stops E1 = E2 = 24 mm).

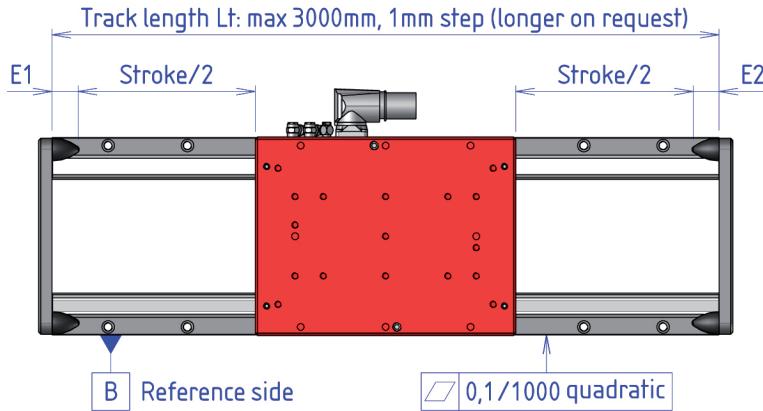

Other standard feature


- Liquid cooling circuit
- Over/under pressure circuit
- 3-point lubrication

Available options

- Protective bellows
- Pneumatic weight compensation

Dimensions SYZAX COMPACT

Carriage type	Unit	C1	C2	C3	C4	C5	C6
Carriage Length Lc	mm	230	230	280	326	372	504
Carriage Width Wc	mm	175	175	175	175	175	175
Carriage Height Hc	mm	65	65	65	65	65	65

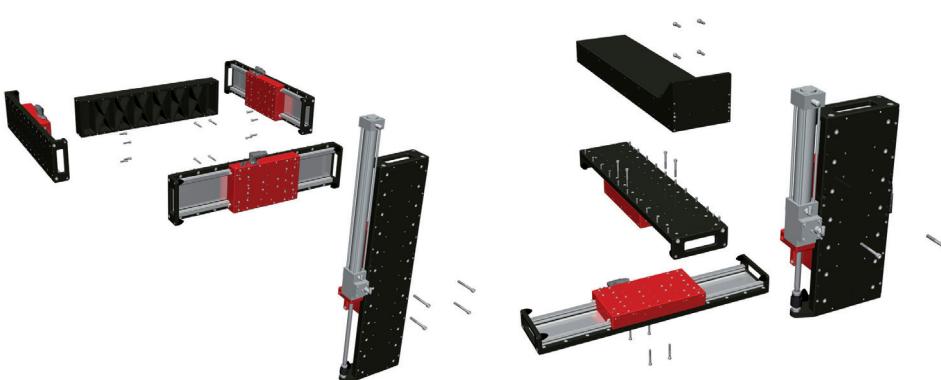

Multiple and easy modules combinations

The modules have native interfaces to build cartesian robots corresponding to the actual needs of specific targeted applications.